

# NTM-10

## Shooting Target

# Noptel

- Simple operation and set-up
- Battery operable
- Operates with Noptel Expert unit
- Rugged construction, indoor and outdoor use
- Flash on hit
- Hit counting
- Operation distance 5-75m
- Electronic target (pop-up) activation on hit
- Stand alone operation
- Mounting to NT-12 target board rail



The NTM-10 target module detects the hit and miss and gives a bright flash when hit.

The Noptel Target Hit Indicator is utilized with Noptel Expert shooter training device indoors or out of doors. It works like a LOMAH unit with the Noptel Expert unit.

When the NTM-10 unit is mounted to a target board, it enables arranging of scenario possible anywhere.

The target system can be used stand-alone on a pole or tripod, or mounted and connected to a pop-up target lifter, when a pop-up type function is required.

# Noptel NTM-10 Target Hit Indicator and Flash

The Noptel NTM-10 is an easy-to-use active target system that is utilized with Noptel Expert Shooting skills training device. It enables a simple and fast setup for wide variety of training scenarios indoors and out of doors.



## NTM-10 Hit indicator

NTM-10 comprises Prism, Target receiver, Led hit flash, Hit counter and connection to target lifter. The unit is water tight and can be used indoors and out of doors.

When the Noptel Expert training device detects a hit, it sends an optical hit beam to the target. Target receiver detects it and gives a bright flash. The hit counter is increased by one hit.




## NT-12 target

NT-12 is a plywood target with mounting rail for NTM-10. It can be equipped with [pole attachment](#).

Outdoors it is utilized mounted to a 20x20 or 20x50 mm wooden or metal pole. Indoors and on solid ground it is utilized mounted to a tripod using [tripod adapter](#).

Target lifter operation requires cable connection to the lifter. It enables target activation when the hit indicator detects a hit.

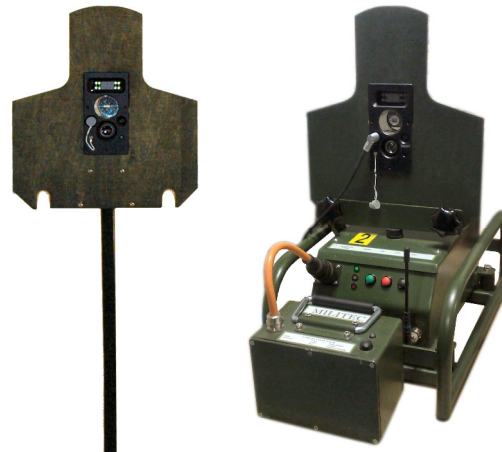

## Typical technical specifications

### NTM-10 Typical technical specifications

- Shooting distance 5-75m
- Operating temperature -20 ... +50 °C
- Connection with cable to target lifter
- Weight 385 g
- Size L/W/H 152 x 83 x 41 mm
- Power supply 2xAA battery (also rechargeable type)
- Operation time up to one week

### NT-12 Typical technical specifications

- Target board material: Plywood
- Target board size W/H 28 x 32 cm
- Target board weight 0,25 kg
- Pole attachment material: Steel
- Pole attachment size: 20x20 mm and 20x50 mm
- Tripod adapter material: Aluminium
- Tripod adapter thread: 3/8-16 UNC

Pictures are referential. All specifications are subject to change without notice. Ref. M42994BE ©Noptel 2017.